

Cane Creek Thudbuster LT Bushing Replacement Instructions



Fig. 1 - Remove skewer and elastomers.

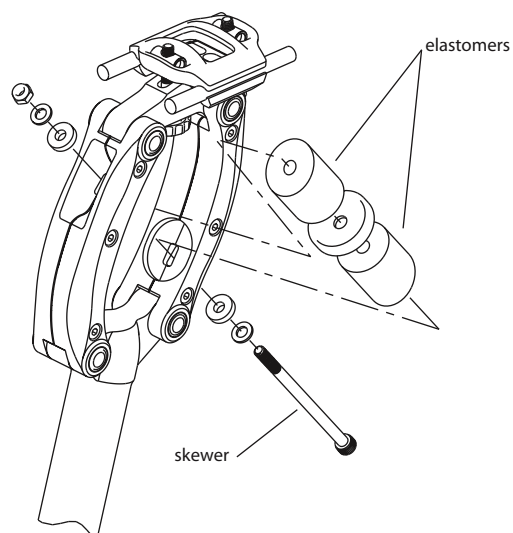


Fig.2 - Remove bolts from arms.

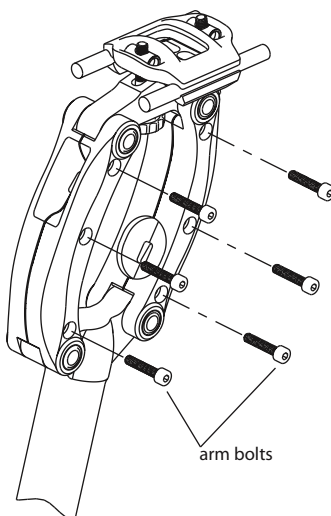


Fig. 3 - Remove arms and pivot shims from post (saddle clamp may need to be loosened)

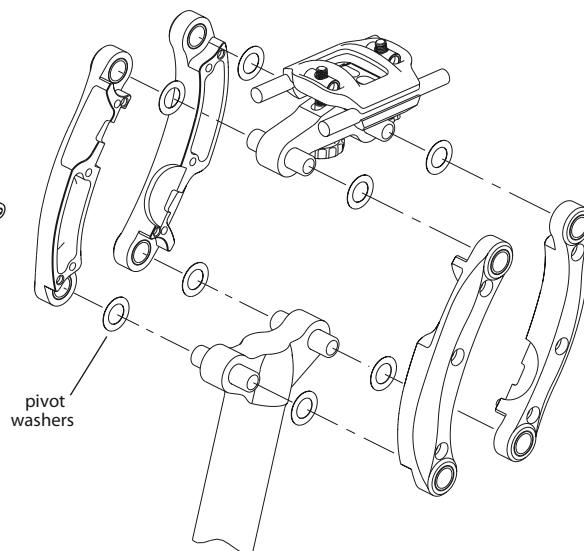


Fig. 4 - Use bushing replacement tools as shown to replace bushings on each arm.

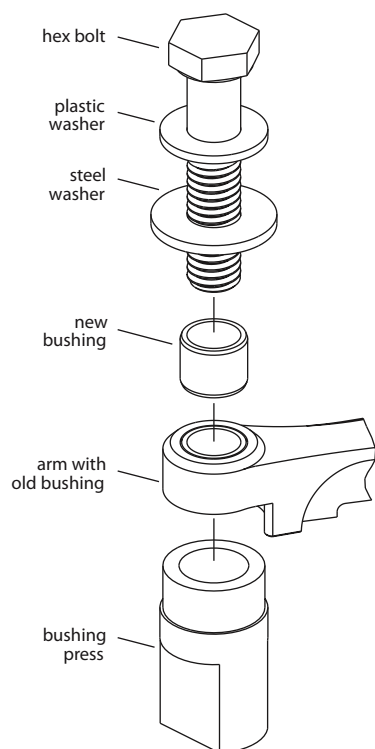


Fig. 5 - Tighten bolt on replacement tool to push old bushing out and new bushing into place.


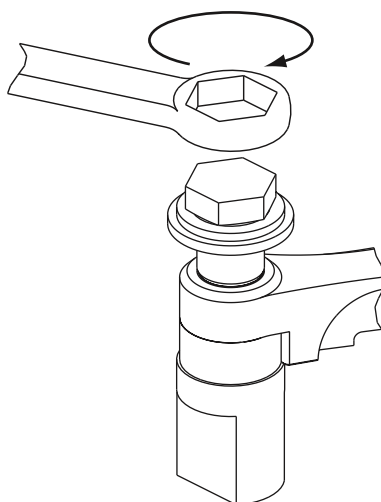


Fig. 6 - Replace all components in reverse order. Torque arm bolts to 3.4 Nm (30 in-lb).

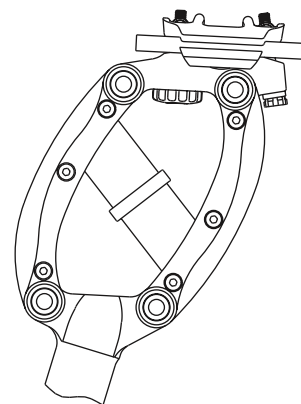

Cane Creek Thudbuster ST Bushing Replacement Instructions



Fig. 1 - Remove bolts from arms

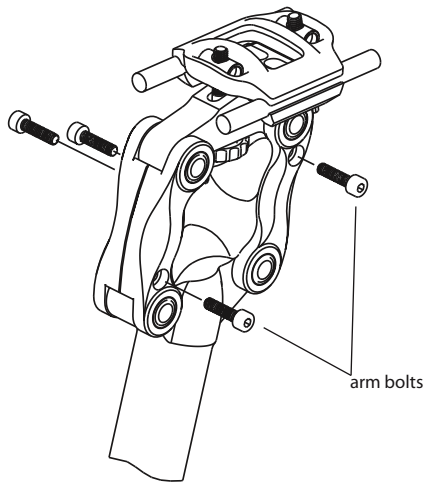


Fig.2 - Remove arms and pivot shims from post (saddle clamp may need to be loosened)

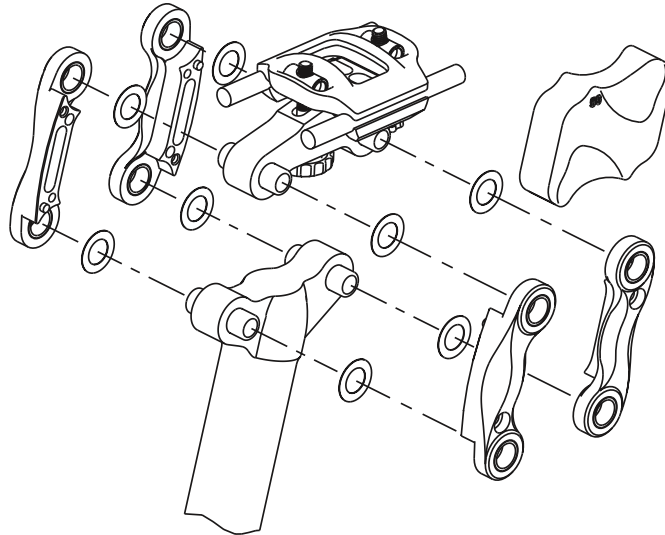


Fig. 3 - Use bushing replacement tools as shown to replace bushings on each arm.

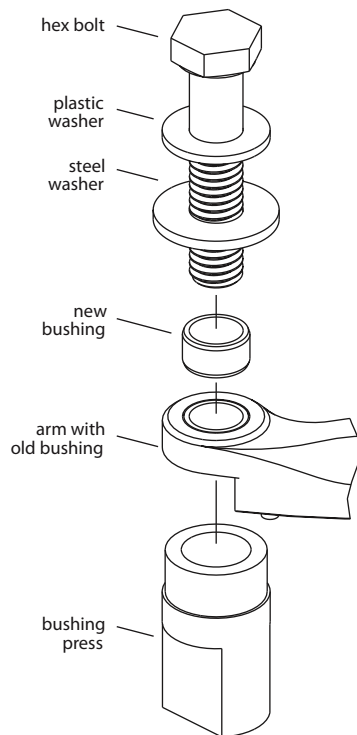


Fig. 4 - Tighten bolt on replacement tool to push old bushing out and new bushing into place.


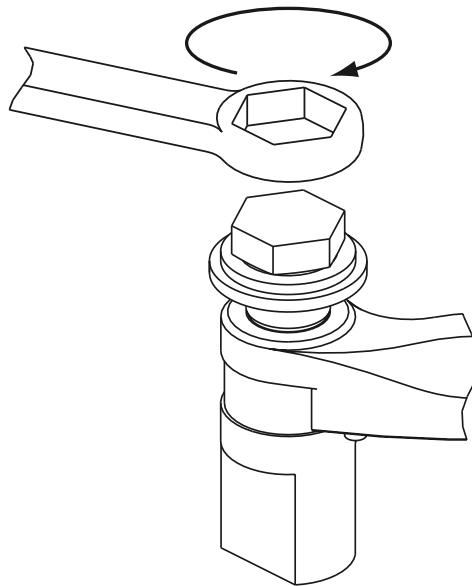


Fig. 5 - Replace all components in reverse order. Torque arm bolts to 3.4 Nm (30 in-lb).

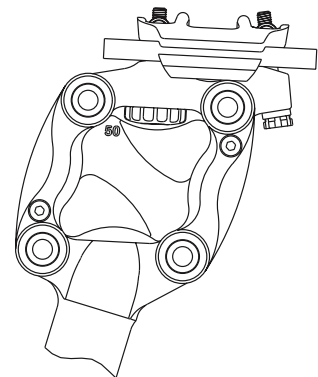

WARRANTY: Cane Creek Cycling Components warrants its bicycle products for a period of 2 years from the original date of purchase. Any product that is found to be defective in materials or workmanship will be repaired or replaced at the discretion of Cane Creek. This warranty applies to the original owner only. This warranty does not cover damage or failure resulting from misuse, abuse, alteration, neglect, wear and tear, crash or impact, lack of maintenance or other conditions judged by Cane Creek to be abnormal, excessive, or improper. It is mandatory that a Return Authorization Number (RA#) be obtained by calling Cane Creek before any product is returned. Additionally, a dated Proof of Purchase must accompany the product when returned.